

The most important aspects summarized

Eternity-Jo introduces the ET3-KT88 tube amplifier from the ET series. Crafted in manual work in Switzerland the tube amplifier comes with the following functions and specifications:

- Triode/Pentode switchable
- Triode $2x 25 W_{RMS}$ (Sinus) at 8Ω
- Pentode $2x 50 W_{RMS}$ (Sinus) at 8Ω
- 12-step bias-current switch: Adjustment to speakers with efficiency of 84 97 dB
- Integrated amplifier or power amplifier switchable!
- Bias-current control of the KT88 tubes (real time)
- Standby/heating mode only (listening pauses etc.)
- Van der Veen ring core transformer
- Remote control in a noble aluminum case

Uncompromising Quality

The noble case of the ET3-KT88 is milled out of an aluminum plate and available either in black or in anodized silver. We also offer other color options. For gaining top class sound, only hand-selected and pre-tested components are used.

See (or rather hear) for yourself

Make a noncommittal listening appointment at Eternity-Jo's in Schaffhausen in beautiful Switzerland. Per request, a test listening can be arranged at the customer's facilities with his/her existing range of equipment.







Special features

- Standby/heating only (listening pauses etc.)
- 12-step bias-current switch: Adjustment to speaker with efficiency of 84 – 97 dB
- Switch between integrated and power amplifier
- Processor-controlled bias-currents of the KT88 tubes
- Correction possibility for the single tubes at the front! No need to open the machine
- Test mode for adjusting the bias-currents
- Selectable display mode On/Off
- Indication of preheating phase
- IR remote with possibility to switch between sources
- Protective cover for tubes made of acrylic glass

Installed components

- Solen coupling capacitors
- Metal film (oxide) resistors 1% or 2%
- Only long-lasting 105 °C electrolytic capacitors
- Transformer Amplimo-55pp4k5h
- Neutrik RCA sockets
- Schaffner line filter
- Ring core power transformer
- Several other high-quality components
- Case completely made out of aluminum







Operation mode

Push-Pull Class AB - Super linear Switchable between integrated and power amplifier

Power

Pentode 2 x 50 W_{RMS} (Sinus) at 8 Ω Triode 2 x 25 W_{RMS} (Sinus) at 8 Ω

Frequency Response

 $16 \ Hz - 20 \ kHz \pm 0.5 \ dB \ at \ 1 \ W_{RMS} \ 6 \ Hz - 30 \ kHz \pm 1.5 \ dB \ at \ 20 \ W_{RMS}$

Distortion Ratio

Less than 0.5% at $1\,kHz$ / $10\,W$

Signal-to-noise Ratio Higher than 95 dB

Input Sensitivity / Impedance 750 mV_{RMS} / 50 k Ω

Output Impedance

4-8 Ω – for speakers with an efficiency from 84 dB

Channel Options

CD - TUN - DVD - AUX

Installed Tubes

Pre-Amplifier/Driver: 4 x 6SN7GT – Tung-Sol Power Amplifier: 4 x KT88-C Carbon or 4 x KT88-D Linlai

Supply Voltage

230 V AC, max 450 W

Power consumtion

160 W, heating 70 W


Measures (w x d x h) / Weight

482 x 290 x 190 mm - 22.5 kg without packaging

SWISS MADE



SWISS CRAFTED TUBE AMPS

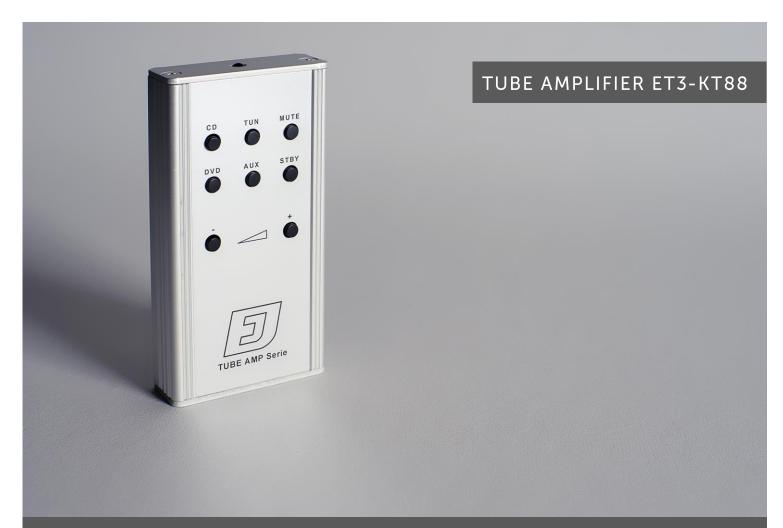

ETERNITY-JO YOUR SPECILAIST

Guarantee

Amplifier and remote control 24 months KT88 Tubes 6 months 6SN7GT Pre-Amp Tubes 6 months

The current list prices incl. 8% VAT (Switzerland) can be found on www.eternity-io.ch

Other case colors available for extra charge

Eternity – Jo
SWISS CRAFTED TUBE AMPS
Manufacture
Josef Kurt Zimmermann
Kronenhalde 12
CH-8200 Schaffhausen
Mobil: +41 79 246 27 80

Fixed line: +41 52 625 14 37 kzimmermann@eternity-jo.ch

www.eternity-jo.ch



